STAMPING NOTES (TOP ROW):


- 1. CYLINDER THREAD: M25X2
- 2. COUNTRY OF MANUFACTURE: USA
- 3. MANUFACTURER MARK: M4141
- 4. MANUFACTURING SERIAL NUMBER: P123456
- 5. MANUFACTURER: LUXFER

STAMPING NOTES (MIDDLE ROW) :

- 1. MINIMUM GUARANTEED WALL THICKNESS: 12.5mm
- 2. EMPTY WEIGHT: 14.3 KG
- 3. WATER CAPACITY: 11.1 L
- 4. WORKING PRESSURE: PW207 BAR
- 5. TEST PRESSURE: PH311 BAR

STAMPING NOTES (BOTTOM ROW):

- 1. DESIGN STANDARD: ISO 7866
- 2. COUNTRY OF APPROVAL : GB
- 3. INTERNATIONAL MARKS: (6
- 4. INDEPENDENT INSPECTION APPROVAL NUMBER: 1266
- 5. INDEPENDENT INSPECTION STAMP : A
- 6. ORIGINAL HYDRO TEST DATE: YYYY/MM

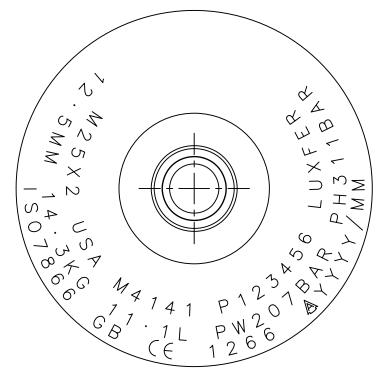

7.25" (184.2mm) O.D.

DESIGN APPROVAL SIGNATURE (PDF FILE COPY)

GENERAL NOTES:

- 1. FOR STAMPING NOTES (ROW 1) 4; SERIAL NUMBER VARIES DEPENDING ON THE CYLINDER PURCHASED AND IS PRECEDED BY THE CYLINDER LETTER IDENTIFIER.
- 2. (E MARK STAMP HEIGHT NOT LESS THAN 5mm, ALL OTHER ISO MARKINGS NOT LESS THAT 5mm, ALL DOT MARKINGS NOT LESS THAN 1/4".
- 3. THIS IS A CONTROLLED DOCUMENT. THE PORTABLE DATA FORMAT (PDF) FILE COPY MUST BE SIGNED TO BE VALID.
- 4. ANY ALTERATION FROM THIS STAMPING DIAGRAM MUST BE APPROVED BY THE FACILITY ENGINEERING DEPARTMENT.

							NONE	OTHERWISE SPECIFIED ANGULAR ± 1°	SHARP EDGES UNLESS NOTED	SK-751-110-0	5.DV
							DATE 11-19-08	FRACTIONAL ± 1/16	125	DEFINITIONS: 1. SMI — STANDARD MEASURING I 2. TC — TOOL CONTROL	INSTRUM
							DRAWN BY R. BOISVERT	DECIMAL .X .XX .XXX ±.1 ±.02 ±.00		3. FAC - FIRST ARTICLE CONTROL	L
"This document contains proprietary data of Luxfer Gas Cylinders and shall not be used or disclosed in whole or in part to design or fabricate any product of any purpose, nor							APPROVED	USED FOR / ON PART OF			- v
		PER DCN	0293 RELOCATE	CE MARK	RAB	3-7-19		NAME		— CE MARK, M25 UMBER	R
reproduced or transmitted to any other organization without the express written permission of Luxfer Gas Cylinders."	REF.		CHANGE		BY	DATE	SHEET 1 OF 1	CROWN MARKING	LAYOUT C	-SK-751-110-05	5